

DESCRIPTION

The H99T is a small aperture housing for accent and task lighting.

APPLICATION

The H99RT is designed for use in non-insulated existing ceiling or for existing insulated ceilings where insulation can be kept 3" from all sides of the housing. It can be installed from below the ceiling.

Catalog #	Type
Project	
Comments	
Prepared by	Date

DESIGN FEATURES

A...Housing

Die-stamped 20 gauge CRS with white powder coat finish.

B...Junction Box

J-Box features include:

- UL listed for through branch circuit wiring
- Seven 1/2" trade size knockouts with true pry-out slots
- Four pryouts with integral strain relief for non-metallic sheathed cable

C... "Quick Connect" Connectors

Three "Quick Connect" connectors eliminate need for separate wire nuts - simply strip supply wires and push in.

D...Socket

Fixed position porcelain socket with nickel plated brass screw shell provides consistent lamp positioning.

E...Remodel Clips

Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

F...Thermal Protector

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Labels

- UL Listed for Damp Location
- UL listed for Feed Through
- CSA Certified



H99RT


4" Non-Insulated Ceiling Recessed Remodel Housing

4" TRIMS

FOR USE IN NON-INSULATED CEILINGS OR INSULATED CEILINGS WHERE INSULATION CAN BE KEPT 3" FROM ALL SIDES OF FIXTURE FOR USE IN EXISTING CEILINGS


UPGRADE FEATURES:

- QUICK CONNECT CONNECTORS

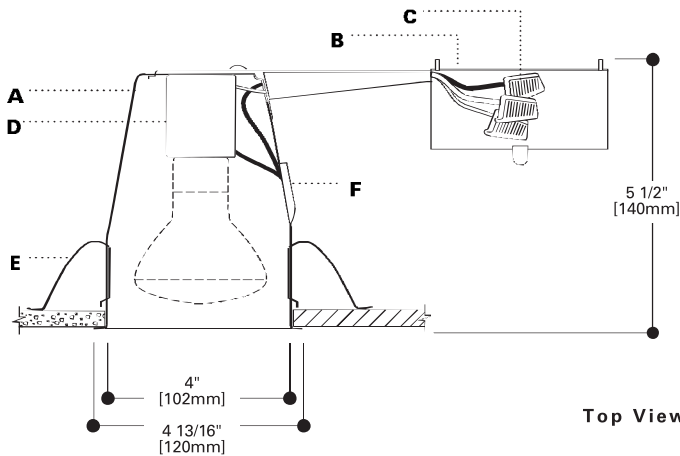

Opening should be matched to template supplied with housing

Top View

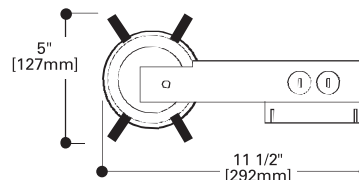

Ordering Information on reverse

TRIMS

ORDERING INFORMATION

SAMPLE NUMBER: H99RT-999P

Order housing and trims separately.

Housing



H99RT=4" Non-Insulated Ceiling Small Aperture Remodel Housing

Trims



REFLECTORS



999

Specular Reflector Cone
50W R20, 40W R16, 50W PAR20, 40W A19
 999P=Specular Clear Reflector with White Trim Ring
 999RG=Residential Gold Reflector with White Trim Ring
 999H=Haze Reflector with White Trim Ring
 999MB=Specular Black Reflector with White Trim Ring
 999SL=Specular Clear Reflector with Silver Trim Ring
 OD: 5 1/16" (129mm)

BAFFLES



993

Coilex Baffle with Die Cast Trim Ring
50W R20, 40W R16, 50W PAR20
 993P=Black Baffle with White Trim Ring
 993PB=Black Baffle with Polished Brass Trim Ring
 993W=White Baffle with White Trim Ring
 993SL=Black Baffle with Silver Trim Ring
 OD: 5 1/16" (129mm)

ADJUSTABLES



996

Eyeball - 15° Tilt
50W PAR20
 996P=White Eyeball
 996SL=Silver Eyeball
 OD: 5 1/16" (129mm)



998

Eyeball - 30° Tilt
40W R16, 60W PAR16
 998P=White Eyeball
 998PB=Polished Brass Eyeball
 998SL=Silver Eyeball
 OD: 5 1/16" (129mm)

OPEN



945

Metropolitan Ice Light
50W PAR20, 50W R20
 945=Clear Frosted
 945BLUE=Blue Frosted
 OD: 5 5/16" (135mm)



946

Metropolitan Deco
50W PAR20, 50W R20
 946BC=Green Tint Rings with Black Chrome Metal Body
 946PB=Green Tint Rings with Polished Brass Metal Body
 OD: 5 5/8" (143mm)



990

Pinhole Trim
50W R20, 40W R16, 50W PAR20
 990P=White Die Cast Trim
 990SL=Silver Die Cast Trim
 OD: 5 1/16" (129mm)

WALL WASH



992

Wall Wash with Baffle
50W R20, 40W R16, 40W A19
 992P=White Scoop and Trim Ring, Black Baffle
 992W=White Scoop and Trim Ring, White Baffle
 992SL=Silver Scoop and Trim Ring, Black Baffle
 OD: 5 1/16" (129mm)

SHOWER LIGHT



951

Shower Light
50W PAR20, 50W R20, 40W A19
 951PS=Shower Light, White Trim Ring, Glass Lens
 951SLS=Shower Light, Silver Trim Ring, Glass Lens
 OD: 5 1/16" (129mm)

Note: Specifications and Dimensions subject to change without notice.

Visit our web site at www.cooperlighting.com